


- Signing Notes:**
- 1.) Refer to traffic sign bubble legend shown on sheet S-xx.
 - 2.) Refer to traffic sign number legend shown on sheet S-xx.
 - 3.) Must maintain all existing poles and signs until new poles are installed.

- Construction Notes**
- 1 Flagmount sign to the north.
 - 2 Flagmount sign to the south.
 - 3 Paint curb yellow between signs.

- Striping Notes:**
- 1.) Remove all conflicting striping and pavement markings. Remove all centerline striping between STOP BAR and intersection.
 - 2.) Place NDW over existing striping toward center of roadway.
 - 3.) Refresh or replace existing striping where necessary.
 - 4.) Refer to pavement marking standard detail blocks shown on Std. Drg. Nos. TM500, TM503 and P-434.
 - 5.) All longitudinal line work to be non-profile, 90 mil., extruded thermoplastic.
 - 6.) All transverse line work to be Type "A" thermoplastic.
 - 7.) All legend, symbols and arrows to be Type "B-HS" thermoplastic.

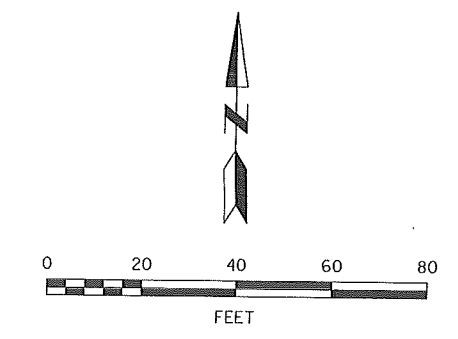

Plot Date: 4/22/2015 9:58:51 AM Filename: S:_L\Design\T00419 - East Portland RFB Project\CAD\PLAN_SHEETS\SHT S-07 PERMANENT SIGNING AND STRIPING PLAN - NE GLISAN ST AT NE 131ST PL\LOT_SHT_S-07.dgn

NO.	DATE	DESCRIPTION	APPD.
		REVISION	


DESIGNED BY
M. Haines

DATE APPROVED
April 2015

CAD BY
M. Haines

CHECKED BY
C. Shearer



L. Wardrip



APPROVALS:

Steve Townsend
SUPERVISING ENGINEER REG. PROF. ENGR. NO. 16399PE

Steve Townsend
CITY ENGINEER REG. PROF. ENGR. NO. 51538PE

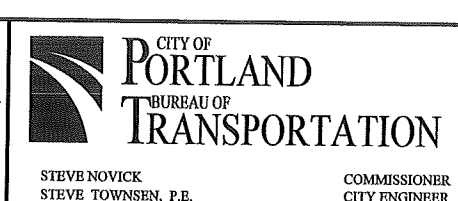

East Portland Rapid Flash Beacon Project

Permanent Signing and Striping Plan
N.E. Glisan St. at N.E. 130th Pl.

174 SECTION
3043
PROJECT NO.
T00419
SHEET NO.
S-7