Johnson Creek Watershed

working for clean rivers

Eastmoreland-Woodstock Sewer Repair Project

Construction Update

May 7, 2014

CONTACT: **Debbie Caselton, 503-823-2831**
Debbie.Caselton@portlandoregon.gov

Construction continues on a project in your neighborhood to repair or replace about 40,000 feet of severely deteriorated sewer pipes that are more than 60 years old. The work will make the sewer system work more effectively and protect water quality, public health and the environment.

Construction should be completed by summer 2015. The project area is bordered by SE Woodstock Boulevard on the north, SE 28th Avenue on the west, SE 45th Avenue on the east and SE Crystal Springs Boulevard on the south. See map on back.

Developments of Note

SE Malden Street will not be using the pipe bursting method due to such poor condition of the existing sewer. The sewer will need to be replaced using the open trench method. Work on SE Malden Street will be on hold until crews are finished with the open trench work on SE Knapp Street. In the meantime, pipe bursting crews will continue to SE Crystal Springs Blvd instead of Malden (see schedule below).

Construction Schedule

Below is the estimated construction schedule for the next couple of weeks. As the contractor completes construction on each street, a temporary asphalt patch is applied. They will return at a later date to apply permanent paving.

Week of May 12

- SE Crystal Springs Blvd (SE 37th to Cesar E Chavez Blvd) – Set up and start pipe burst, connect or install manholes, and install new branches to connect houses to main public sewer pipe.
- SE Crystal Springs Blvd (Cesar E Chavez Blvd to approx. 40th) – Set up pipe burst.
- SE Knapp Street (Cesar E Chavez Blvd to SE 42nd to SE 36th) – Install new branches to connect houses to main public sewer pipe.
- SE Knapp Street (SE 42nd to 37th) – Install storm drains.
- SE Flavel and SE Rex (east and west of 42nd) – Continue permanent paving.
- SE Lambert (between 42nd and 44th) – Continue permanent paving.
- SE 44th Avenue (between Lambert and Rex) – Continue permanent paving.

Week of May 19

- SE Crystal Springs Blvd (SE 37th to Cesar E Chavez Blvd) – Finish installing new branches to connect houses to main public sewer pipe.
- SE Crystal Springs Blvd (Cesar E Chavez Blvd to approx. 40th) – Pipe burst, connect or install manholes, and install new branches to connect houses to main public sewer pipe.
- SE Knapp Street (Cesar E Chavez Blvd to SE 42nd to SE 36th) – Install new branches to connect houses to main public sewer pipe.
- SE Knapp Street (SE 42nd to 37th) – Install storm drains.

Continued

ENVIRONMENTAL SERVICES
CITY OF PORTLAND
working for clean rivers

Over one-third of Portland's 2,500 miles of sewer pipes are more than 80 years old.
Projects to replace or repair aging sewers are important for protecting water quality, public health, and the environment. Learn more at www.portlandoregon.gov/bes.

What to Expect During Construction

- Typical work hours are 7:00 a.m. to 6:00 p.m. Monday through Friday, but may work during the same hours on Saturdays.
- Construction will create noise, vibration and dust and will disrupt normal neighborhood activity.
- Traffic control signs will be set up. The contractor will maintain local access, but you should expect delays.
- On-street parking in or near the work area will be prohibited during construction hours. Please plan to move your vehicle each day by 7:00 a.m.
- Equipment and materials may be stored on nearby streets overnight.
- There may be periods of inactivity between construction phases.
- A city inspector will be on-site during work hours and may be able to assist you with construction concerns. Inspectors typically wear a safety vest and hard hat.
- Please stay clear of all construction activities. Please keep your children from harm and instruct them to stay clear of all construction activities. We also appreciate your keeping pets and vehicles out of the construction areas.
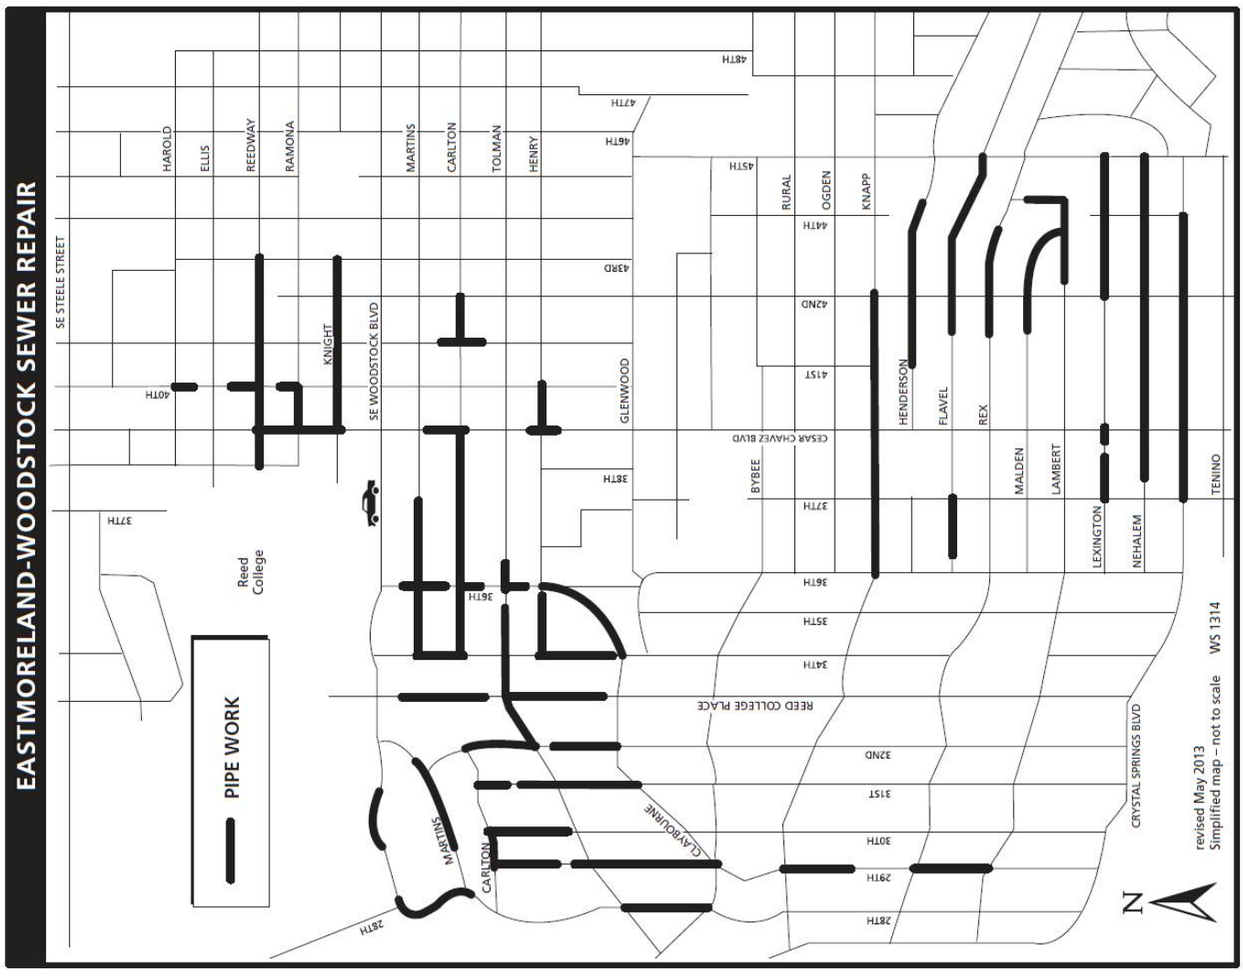
For More Information
Learn more about this project at www.portlandoregon.gov/bes/EastmorelandWoodstock. To receive project updates by email, send an email to Debbie Caselton at Debbie.Caselton@portlandoregon.gov with "Eastmoreland" in the subject line.