



# Standard Drawing Report

**Date:** October 4, 2017

**Technical Owner:** Civil – Brett I. Kesterson

**Standard Drawing No.** P-526      **Calculation Book No.**

**Drawing Title:** Residential Driveway (Historic)



Expires 06/30/2019

## Background Information, Including Reference Material:

Concrete pavement designs using WinPAS 12 pavement thickness design of pavement structures developed by the American Concrete Association based on the 1993 AASHTO Guide for Design of Pavement Structures.

American Concrete Pavement Association strength converter using the ACI 330 method to determine flexural strength from compression strength.

Jointing Guidance: Portland Cement Association (PCA) document on Placing Joints in Concrete Flatwork: Why, How, and When.



20170310131440372  
.pdf

FHWA Designing Sidewalks and Trails for Access Parts 1 (1999) and II (2001), Rev. ed.

## Assumption Made:

Driveways are poured to a true thickness of 6 inches, not a nominal 5-1/2 inches.

Driveway subgrade was assumed to have poor soils, low reliability and poor serviceability to account for soil conditions throughout City. Flexural strength of 478psi from 3000psi compressive strength.

Report made by:  
Name: Brett I. Kesterson, P.E.  
Title: Senior Engineer

Report Date: October 4, 2017  
Page 1 of 2  
P-526 Standard Drawing Report

**Design Narrative:**

This driveway design was constructed in the first part of the 20<sup>th</sup> century. There was resistance to replace this driveway with later designs so Portland allows its use to only replace existing driveways of this type.

Recommend not exceeding 12 feet for scoring grid.

These designs conform to Federal Highway Administration (FHWA) ADA Accessibility Guidelines and Practices.



# Placing Joints in Concrete Flatwork: Why, How, and When

## Contraction/Control Joints

Contraction/control joints are placed in concrete slabs to control random cracking. A fresh concrete mixture is a fluid, plastic mass that can be molded into virtually any shape, but as the material hardens there is a reduction in volume or shrinkage. When shrinkage is restrained by contact with supporting soils, granular fill, adjoining structures, or reinforcement within the concrete, tensile stresses develop within the concrete section. While concrete is very strong in compression the tensile strength is only 8 to 12 percent of the compressive strength. In effect, tensile stresses act against the weakest property of the concrete material. The result is cracking of the concrete.



There are two basic strategies to control cracking for good overall structural behavior. One method is to provide steel reinforcement in the slab which holds random cracks tightly. When cracks are held tightly or remain small, the aggregate particles on the faces of a crack interlock thus providing load transfer across the crack. It is important to recognize that using steel reinforcement in a concrete slab actually increases the potential for the occurrence of random hairline cracks in the exposed surface of the concrete.

The most widely used method to control random cracking in concrete slabs is to place contraction/control joints in the concrete surface at predetermined locations to create weakened planes where the concrete can crack in a straight line. This produces an aesthetically pleasing appearance since the crack takes place below the finished concrete surface. The concrete has still cracked which is normal behavior, but the absence of random cracks at the concrete surface gives the appearance of an un-cracked section.

Concrete slabs-on-ground have consistently performed very well when the following considerations are addressed. The soils or granular fill supporting the slab in service must be either undisturbed soil or well compacted. In addition, contraction joints should be placed to produce panels that are as square as possible and never exceeding a length to width ratio of 1.5 to 1 (Figure 1). Joints are commonly spaced at distances equal to 24 to 30 times the slab thickness. Joint spacing that is greater than 15 feet require the use of load transfer devices (dowels or diamond plates).

Figure 1a: Joint Spacing in Meters


Figure 1b: Joint Spacing in Feet

Contraction joints may be tooled into the concrete surface at the time of placement. Joints may be tooled into the surface (first pass) prior to the onset of bleeding or immediately with the first pass of the floating operation. The longer the first pass for jointing is delayed the more difficult it will be to shape clean straight line joints. Tooled joints should be re-established with each successive pass of finishing operations.

Joints may also be sawed into the hardened concrete surface. It is important to understand that the longer sawing is delayed the higher the potential for cracks to establish themselves before sawing is complete. This means that any cracks that occur before the concrete is sawed will render the sawed joint ineffective. Timing is very important. Joints should be sawed as soon as the concrete will withstand the energy of sawing without raveling or dislodging aggregate particles. For most concrete mixtures, this means sawing should be completed within the first six to 18 hours and never delayed more than 24 hours. Early-entry saws are available which may allow cutting to begin within a few hours after placement.

Contraction/control joints must be established to a depth of  $\frac{1}{4}$  the slab thickness (Figure 2). Proper joint spacing and depth are essential to effective control of random cracking.

*Figure 2: Minimum Depth of Contraction Joints*

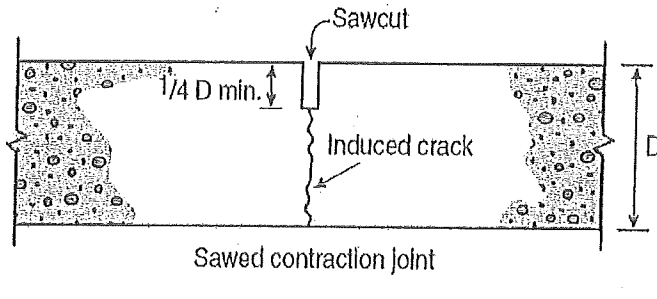

Concrete Basics

Learn about concrete solutions for homes, pavements, buildings, and more.

---

Paving

Buildings & Structures

Homes

Codes & Standards

Cement Manufacturing

Learn

Find technical materials, reference information, and research.

---

MIT Concrete Sustainability Hub

Concrete Technology

Education

Library

Cement and Concrete Research

Materials and Applications

Meetings and Events

Register and learn more about upcoming PCA gatherings.

---

Mar. 13-14, 2017: PCA Spring Congress

May 8-10, 2017: PCA Board Meeting and Fly-In

May 21-25, 2017: IEEE-IAS/PCA Cement Conference

About PCA

Careers

Contact Us

Meetings

Privacy Policy

Member Login

Site Map